



Pure Sine Wave Output for Professional Gaming needs

Real-Time CPU Temperature, Speed and Load Level

Detachable Bluetooth LCD display -

2x USB Charger Ports for Mobile Devices (Type-A / Type-C)



Customizable LED Lighting with Full RGB Color Palette




powerwalker.com

TECHNICAL SPECIFICATIONS

MODEL	VI 1000 GXB	VI 1500 GXB
Power (VA)	1000VA	1500VA
Power (W)	600W	900W
INPUT		
Voltage	230Vac	
Voltage Range	170-280Vac	
Frequency Range	50/60Hz ± 5Hz (Auto sensing)	
OUTPUT		
Voltage Regulation	230Vac ±10 %	
Frequency Range	50/60Hz	
Transfer Time AC to Battery	Typical 6 ms, max. 10 ms	
Waveform (Bat. Mode)	Pure Sine Wave	
Protection	Discharge, Overcharge and Overload Protection	
BATTERY		
Туре	1x 12V / 9Ah	2x 12V / 9Ah
Recharge Time	6-8h to recover 90% of Battery charge	
Protection	Battery Discharge, Overcharge and Overload Protection	
CONNECTIONS AND COMMUNICAT	TON	
Output	4x Schuko or 4x French or 8x IEC	
Protection Port	RJ11/RJ45 (Ethernet Surge Protection)	
Software	ViewPower	
Communication Ports	1x USB port with HID support	
Charger Ports	1x USB port + 1x USB-C port 5V/3.0A (shared)	

PowerWalker VI GXB is a premium line interactive UPS series with state of the art technology and design. The integrated AVR function and **Pure Sinewave Output** ensures clean and stable output during power outages or voltage fluctuations. The UPS functions can be **monitored and controlled via USB communication**, either with a software or without (HID).

As a Gamer your primary concern will be the **protection** and continuity of your Gaming PC, your router and your monitor. By doing so you will be able to bridge short outages and keep playing, or perform a safe shutdown during a longer interruption Furthermore, the UPS status can be color customizable so that you can visually recognize in which mode the UPS is.

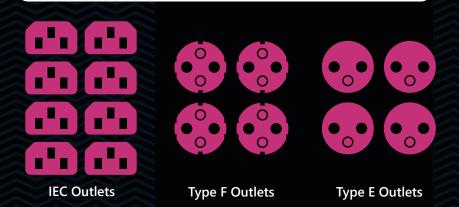



PowerWalker is a brand of BlueWalker GmbH